


# Screen Change For RAPT Fermentation Chamber

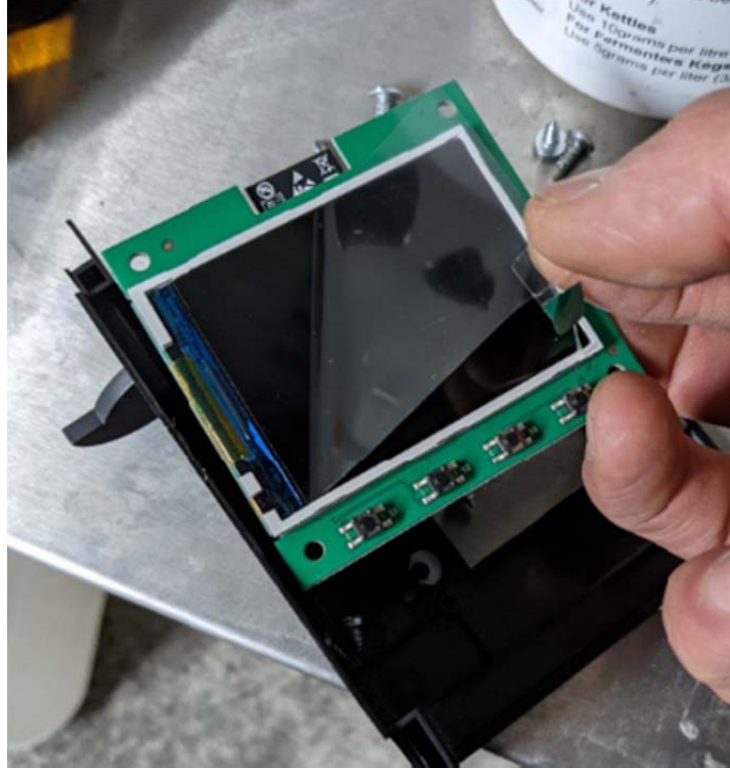

**KegLand Distribution PTY LTD**


**[www.KegLand.com.au](http://www.KegLand.com.au)**

**Remove Top Beer and Gas Line Cover**

Use the tab to release the top cover as shown:



Use screw driver to remove two screws circled below:

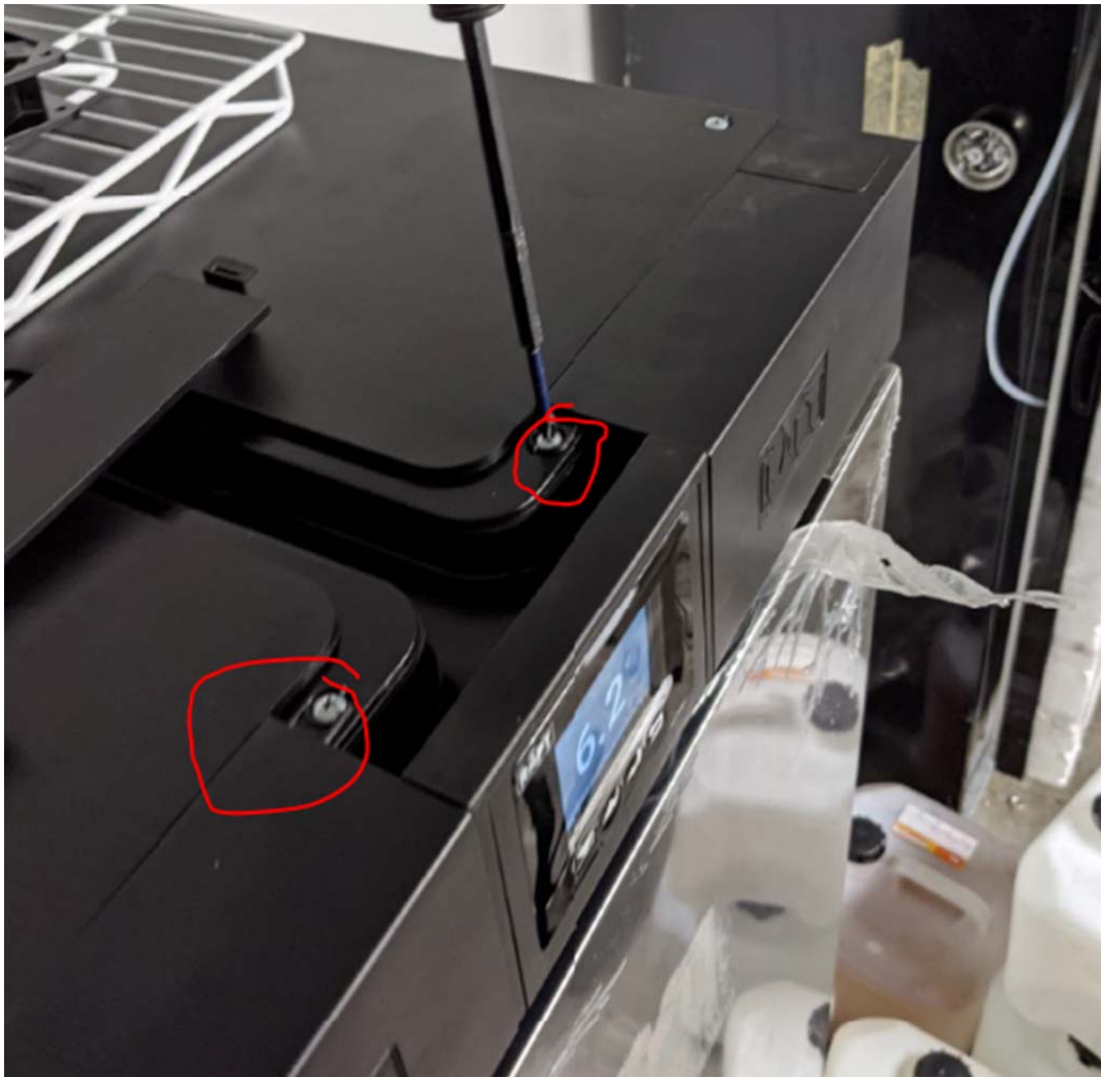

Remove screws from the underside of the screen as shown here:



Remove the left and right side covers by sliding them away from the fridge as show below:



Slide the screen down so you can see the cables behind the screen:



Unplug the cables from the screen PCB board:




Remove 4 screws holding the screen board in place:





If you are replacing the screen PCB board with a new one make sure to remember to remove the protective film before putting the new board into position:

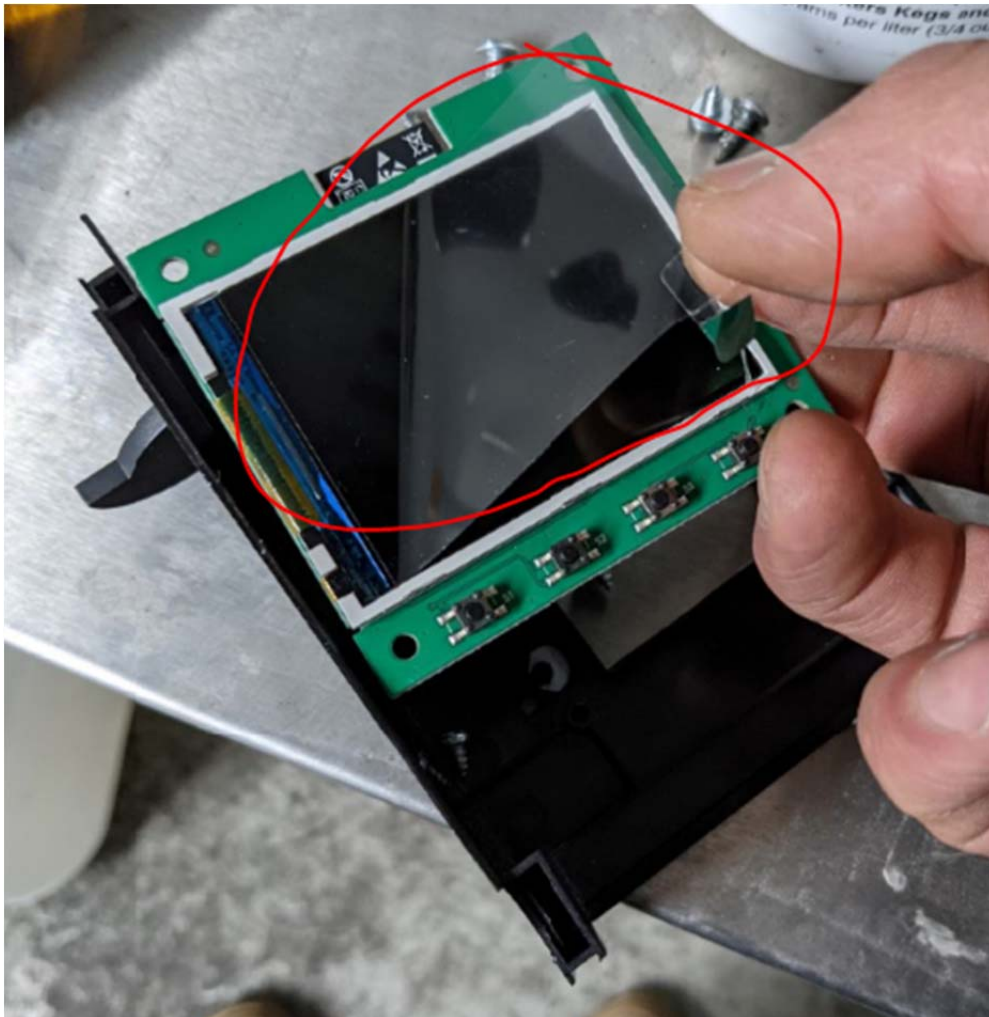

Then reassemble the unit in the same reverse order as mentioned above.